



AF150 LED Pole Light

The AF150 features WATT for WATT the highest foot-candles of light available in the industry. Compare the AF150 to 500 WATTS of metal halide.



AF150	
	100V - 277V (480 optional)
	150 WATTS
	18,250 LM 121 LM/W
	5,000 - 5,500K CCT 70 - 91+CRI
	23" x 12" x 3"
	L70 55,000 HOURS
	Gray, White, Black, or Dark Bronze
	20 Lbs 9.6 KG
	Five Year Warranty Ten Year Optional



LED to Metal Halide,
5 to 1 Ratio in Watt
to Watt Savings




Amerlight's
LED Brightest
in the Industry



Wireless
Controls
Available

Designed and Assembled in the USA



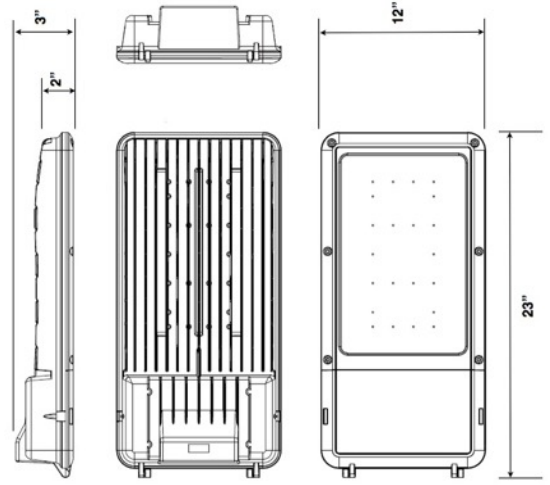

MORE LIGHT

LESS ENERGY

LOWER COST



1 5/8" - 2 3/8" to Pole
Mounting Diameter

360 degree rotation

Adjustable knuckle rotate
180 degrees



Installation

INSTALLATION — Die-cast aluminum arm with integral splice compartment. Standard arm is 4" in length. Aluminum fitter for 4" to 6" OD poles. 2.5 inch mounting diameter size with 2 hex head set bolts. Mounting knuckle rotate/tilts 180 degrees.

ELECTRIC - 14 AWG stranded wire with wire caps

CONSTRUCTION — Heavy gauge die-cast aluminum housing. Integral structural support plate for mounting arm and electrical components ensures rigidity and strength. Hinged aluminum door frame incorporates stainless steel hardware. Continuous silicone gasket surrounds lens for weather-tight seal. Lens: Thermal shock resistant tempered glass lens. Standard fixture colors; Dark Bronze, White, Light Gray. High gloss plastic coated. Custom colors available on special order.