



LN150 Linear High Bay Light



The LN150 features a high efficacy LED with industry leading CRI above 83.

LN150	
	100V - 277V (480 optional)
	150 WATTS
	21,000 LM 140 L/W
	5,000 - 5,500K CCT 83+ CRI
	22" x 15" x 2.3"
	60,000 HOURS IP20
	White
	Five Year Warranty Ten Year Optional

This product is designed for indoor applications. Compare the LN150 to 270 watts fluorescent T5 and 400 watts metal halide.



83+ CRI
Try Color
Technology





Amerlight's
LED Brightest
in the Industry



Wireless
Controls
Available

Designed and Assembled in the USA



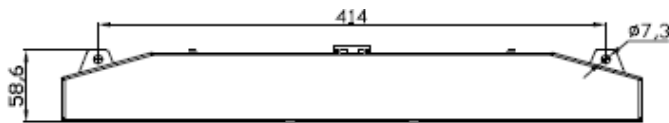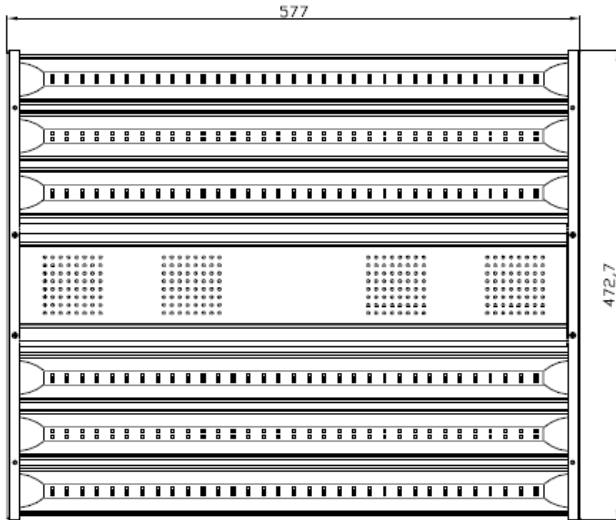

Installation

1. Use a qualified electrical contractor and follow all applicable electrical codes.
2. Attach aircraft hanger wire to the joist or other secure mounting location.
3. Adjust length of wire to achieve the required height and angle from the floor.
4. Properly secure the wire.
5. Please insure that hanger wire meets all local seismic applicable codes.

