



# LN240 Linear High Bay Light



The LN240 features a high efficacy LED with industry leading CRI above 83.

LN240		
	100V - 277V (480 optional)	
	240 WATTS	
	33,600 LM 140 L/W	
	5,000 - 5,500K CCT	83+ CRI
	43.1" x 14.1" x 2.3"	
	50,000 HOURS	IP20
	White	
	Five Year Warranty	

This product is designed for indoor applications. Compare the LN240 to 1000 Watts metal halide or 476 fluorescent T5.



83+ CRI  
Try Color  
Technology



Amerlight's  
LED Brightest  
in the Industry





Wireless  
Controls  
Available

Designed and Assembled in the USA



**AMERLIGHT**  
Advanced LED Technology

[amerlight.com](http://amerlight.com)

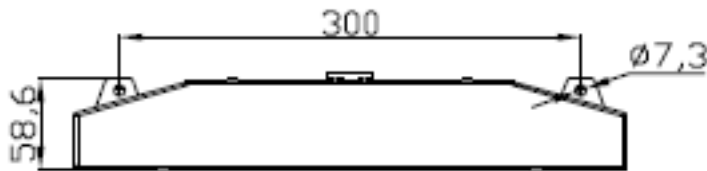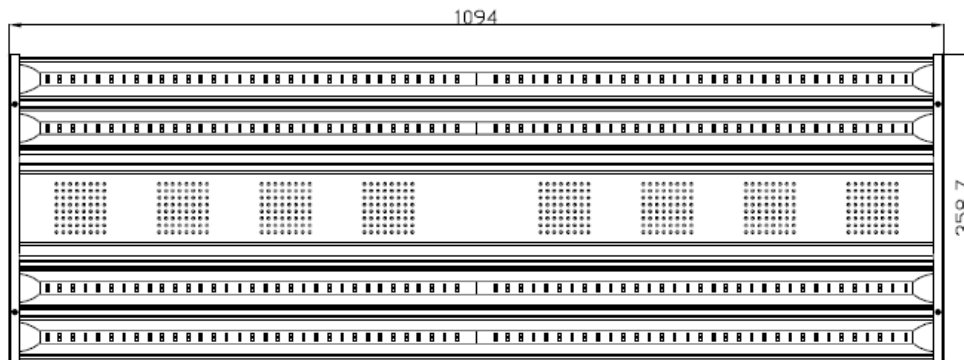

## Installation

1. Use a qualified electrical contractor and follow all applicable electrical codes.
2. Attach aircraft hanger wire to the joist or other secure mounting location.
3. Adjust length of wire to achieve the required height and angle from the floor.
4. Properly secure the wire.
5. Please insure that hanger wire meets all local seismic applicable codes.

